

### Product Description

**KK915** is a Double Sided Resin Cloth Tape with an aggressive solvent acrylic adhesive system and a white siliconised heavy duty paper release liner. A supremely versatile double sided cloth tape



### Product Features

- The tape consists of a 100uM HDPE woven cloth laminated between two thin LDPE films
- A differential coat weight of a high tack and high shear solvent acrylic adhesive system on the OPEN side (4.4 N/cm) and a higher coat weight on the CLOSED (lined) side (7.2 N/cm). This variant specially developed for Tenacious Tapes in Japan
- A premium siliconised white paper release liner not prone to tearing on removal
- Sold in 25 metre length and available in widths from 6mm to 1,300mm


### Benefits

- ✓ High initial tack level offering excellent "wet grab"
- ✓ Differential coat weight, the Open Side having the lower tack level and so stuck to the mounting surface (be it floor or wall) and the lined Side having 60uM and designed to be stuck to the smoother surface first and the lined or Closed side having over 60% higher tack level
- ✓ Can easily be hand torn
- ✓ The backing being an HDPE/LDPE composite is recyclable with other PE & PP waste
- ✓ Good UV stability and ageing for outdoor applications

### Key Markets

- **P.O.S. & Display** As a high tack product for the mounting of merchandising and advertising materials. Suitable for use with PP Flute board
- **Floor Coverings (Exhibition)** Designed for the laying and holding of both permanent and temporary floor coverings, particularly within the exhibition industry. Also for the install of vinyl skirting boards, particularly where use of solvent based contact adhesives are banned
- **Building & Construction** For the installation and holding of PE wraps & drapes and also the joining of builders film, particularly for encapsulation work. The product has excellent clean-remove characteristics from stable surfaces
- **Rural & Outdoors** For joining polythene, repair of PE greenhouses, hydroponics, silage pits etc
- **Shrink, Encapsulation & Mothballing** The KK915 is ideal for use in conjunction with LDPE shrink films used for the preservation of plant and equipment particularly during transporting and storage
- **Manufacturing** For splicing, joining and sealing applications, particularly where used in conjunction with films that may need to be re-cycled

**Note:** The applications are virtually limitless for a product with these features as it offers a great blend of properties and so will find favour in many industries and for many applications where the customer wants a tape that has very high adhesion and good longevity.

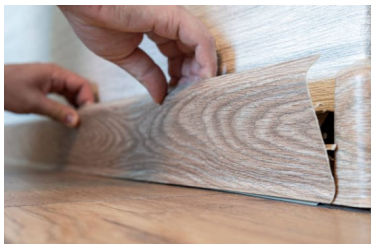

#### DISCLAIMER:

**Values:** All values presented have been determined by standard test methods and are average values only.

**Recommendations:** Whilst we are happy to recommend products from our range for applications, it is imperative that the customer/user complete their own tests to determine suitability for their application under "working conditions" and if longevity is important, that ageing tests be carried out.

**Warranty:** We can only warranty our products to the level that they are consistent with our Product Information Sheet values

**BUT CANNOT accept any responsibility or liability direct or consequential for loss or damage caused as a result of our recommendations.**